



TC50 Touch Probe



Workpiece Measurement



Infrared Transmission



Multidirectional



Wear-free Measuring Mechanism



Single & Mass Production



Contour Measurement



Axes Compensation

Touch Probe TC50

BLUM
focus on productivity



TC50 | Touch Probe | Tactile workpiece measuring system with infrared transmission

Universal High-Speed touch probe with multidirectional measuring mechanism



- Detection of workpiece position
- Correction of workpiece orientation
- Thermal compensation of the machine tool
- Contour measurement

Your benefit:


- Measuring speed up to 3 m/min
- Precise, non-lobing touch characteristics
- No-wear, optoelectronic measuring mechanism
- Use of two measuring systems with one IR receiver
- Extended battery life
- Precise measurement even with coolant
- Proven and robust design

DUO-Mode


Sequential use of two measuring systems with one infrared receiver.

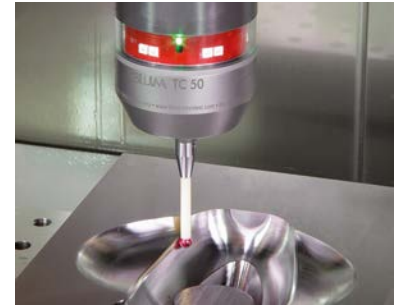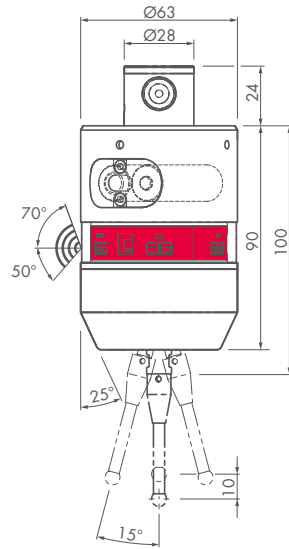

Example: Contour measurement

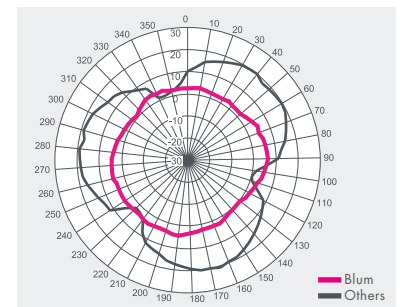

Non-lobing touch characteristics

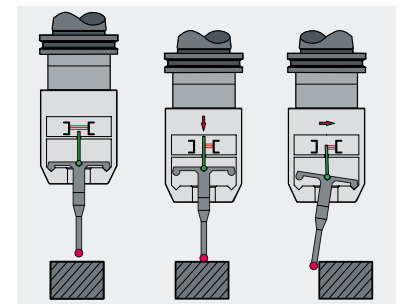

Modern and precise measuring mechanism with optoelectronic signal generation

Technical data

Protection class	IP68
Approach direction	$\pm X, \pm Y, -Z$
Measuring force in XY Z	2 N * 7 N
Max. deflection in XY Z	$\pm 15^\circ$ 10 mm
Max. acceleration	50 m/s ²
Repeatability	0.3 μm 2 σ
Max. probing speed	3 m/min
Mass	925 g
Signal transmission Range	Infrared -50 ... +70° in Z, 360° in X/Y
Battery (2 pieces)	Saft Lithium LS14500 (AA, 3.6 V) 2600 mAh
Tool holder	BTH 50 (HSK, SK, BT, VDI, ...)

* Stylus L = 50 mm

BLUM
focus on productivity

Blum worldwide Service & Support

More than 40 subsidiaries and service offices.

www.blum-novotest.com

Blum-Novotest Ltd.

Unit 15 Granary Wharf Business Park
Wetmore Road, Burton upon Trent
Staffordshire, DE14 1DU
United Kingdom
Phone: +44 1283 569691
Fax: +44 1283 563687
info@blum-novotest.co.uk

Blum-Novotest, Inc.

4144 Olympic Boulevard
Erlanger, KY 41018
USA

Phone: +1 (859) 344 6789
Fax: +1 (859) 344 6799
solutions@blum-novotest.us